

PRIME-MOVER**MODEL M-15B
POWERED
WHEELBARROW**

10 CU. FT. 1500 LBS. CAPACITY

for industrial maintenance . . .
hauling sand, chips, etc. . . .
moving bulk materials



PRIME-MOVER hauls three times its own weight over any type of surface and up steep inclines. A 7 hp. Wisconsin engine powers a fully enclosed transmission-clutch-differential-axle combination engineered for industrial duty. One reservoir of oil lubricates the entire drive.

PRIME-MOVER has served industry and construction for years under the most difficult and demanding requirements. Wherever wheelbarrows or hand carts are used, the M-15B gives laborers the POWER to triple their output with less physical strain . . . greater safety. On intermittent hauling, maintenance or clean-up operations, PRIME-MOVER replaces more expensive equipment and operators . . . and permanently reduces fixed operating expenses by mechanizing repair and maintenance crews.

Here is a rugged, proven, 3/4 ton basic mover that is engineered to the standards you expect and need in an industrial truck. Easy to put to use, simple to operate, powerful and dependable. Built for years of profitable production with a minimum of maintenance.



For in-plant maintenance and construction . . . pouring heavy machinery foundations . . . replacing and resurfacing floors, PRIME-MOVER gets the job done fast. Only 31½" wide, 65½" long, it goes through narrow aisles and doorways without disturbing production.



PRIME-MOVER hauls a big load of castings for foundries and machine shops. Ideal for foundry sand, knock-out, etc. . . . charging cupolas and furnaces. Vital moving parts enclosed against abrasive sand and dust.







For efficient scrap removal, PRIME-MOVER reduces the number of handling operations, maneuvers easily between machines, and hauls chips from several machines every trip.



With quickly interchangeable dump bucket, flatbed, and snow-plow, PRIME-MOVER goes from one job to another with no lost time . . . eliminates the need for special-purpose groundskeeping and maintenance machines that are idle most of the time.

PRIME MOVER M-15B Features and Specifications

WITH PLATFORM

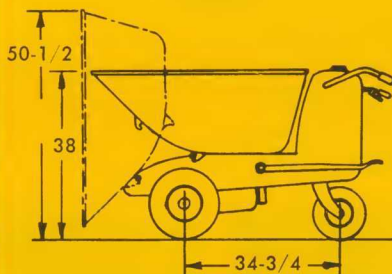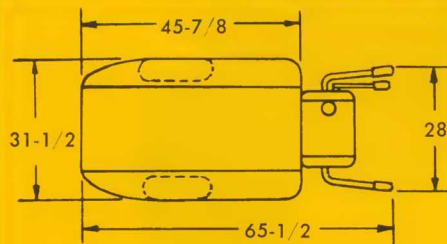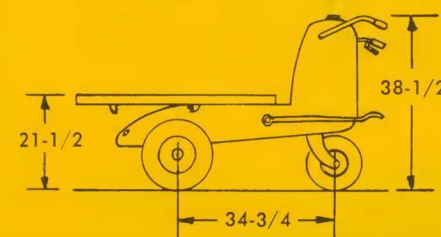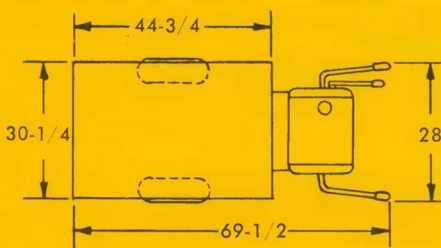


- Load-bearing traction — drive wheels under load to haul 3/4 ton up 20% grades
- Close-quarter maneuverability — convenient controls easy for anyone to operate safely.
- Latch-on beds — interchange without tools.
- Self-cleaning bucket — smooth and rounded, foot pedal controlled, gravity return.
- All enclosed transmission with automotive drive shaft to engine.
- Safety-speed reverse — instant shift from forward for quick accurate spotting.
- Sealed-in lubrication — for minimum maintenance. One reservoir of oil for entire drive.
- Heavy-duty engine — for dependable power.
- All-weather protection — no moving parts exposed.
- Job-wide application — from start of job to final cleanup.

SPECIFICATIONS

Engine, 4 Cycle, Wisconsin BKN	7 h.p.
Capacity	1,500 lbs.
Bucket, Struck	10 cu. ft.
Platform (Std.)	30"x44"
Platform (Large)	42"x48"
Turning Radius	34 3/4"
Chassis Weight	450 lbs.
Bucket Weight	110 lbs.
Fuel Capacity	2 3/4 gals.
Fuel Duration	8 hours
Tires (Pneumatic)	
Front	16" (4.80x8)
Rear	12" (4.10x6)
Tires (Laminated)	
Front	16" (4.00x8)
Rear	12" (4.00x6)
(NOTE: Dual wheels and chains are available.)	

Phantom view of new transmission — differential-axle assembly — all enclosed in one housing. Sealed-in, continuous lubrication.

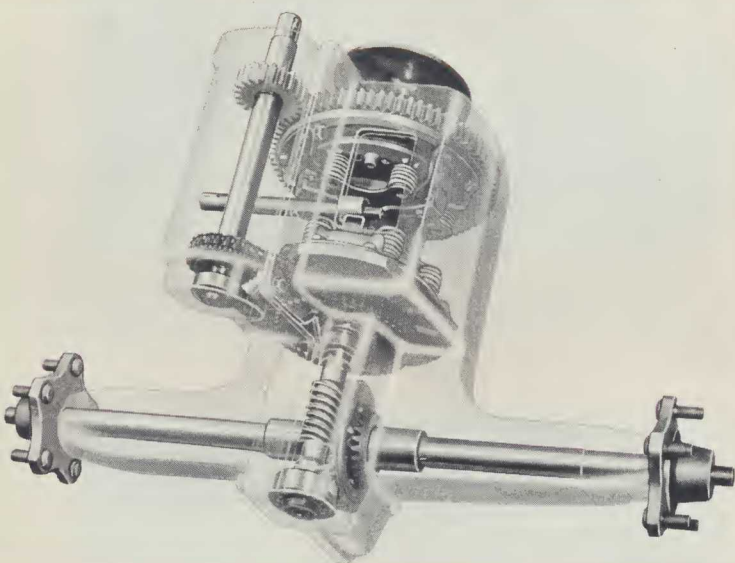

ANOTHER GOOD PRODUCT OF
THE PRIME-MOVER CO., MUSCATINE, IOWA

DISTRIBUTED BY

RUSHMORE & WEBER INC.